

U-TURN

Michel Charlot, 2012






Standing light U-TURN-12-TD-SW-SW

Type	U-TURN-12-TD-SW-SW
Order No	51003803-TD-SW-SW

Lamp type/assembly	Standing light
Size	H 1335 mm
Energy efficiency class	A
Light source	LED, 2x 490 lm
Colour temperature	2700 K, CRI > 80
Operating mode	Dimmable
Operation	On tube, backlit
Ballast (number)	Integrated in cable (1)
Lamp head	Die cast aluminum, wet painted, graphite black
Finish	Black
Diffuser	PMMA, frosted on one side
Tube	Extruded aluminum profile, wet painted, graphite black

Base	Zinc die-cast, wet painted, graphite black
Power cable	Black, L 2000 mm
Mains plug	CH (type J), Schuko (type F) or UK (type G)
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	980 lm
Power consumption	26 W
Rated voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (1600 x 300 x 300 mm)
Weight	10.5 kg

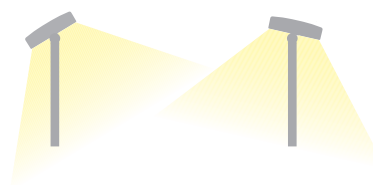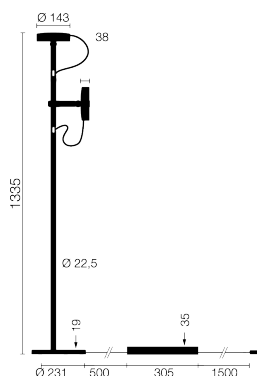

$\eta=97\%$ cd/1000 lm



design
preis
schweiz

Subject to technical modifications and modifications to content. © BELUX AG 03/2016



More information on
www.belux.com/u-turn

BELUX AG

Klünenfeldstrasse 22, Muttenz, CH-4127 Birsfelden
Tel. +41 61 316 74 01, Fax +41 61 316 75 99
www.belux.com, belux@belux.com