

U-TURN

Michel Charlot, 2012



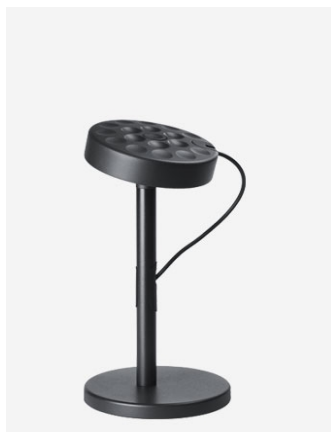


Table light U-TURN-40-TD-SW-SW

Type	U-TURN-40-TD-SW-SW
Order No	51003804-TD-SW-SW

Lamp type/assembly	Table light
Size	H 330 mm
Energy efficiency class	A
Light source	LED
Colour temperature	2700 K, CRI > 80
Operating mode	Dimmable
Operation	On tube, backlit
Ballast (number)	Driver (1), cable integrated
Lamp head	Die cast aluminum, wet painted, graphite black
Finish	Black
Diffuser	PMMA, frosted on one side
Tube	Extruded aluminum profile, wet painted, graphite black

Base	Zinc die-cast, wet painted, graphite black
Power cable	Black, L 3000 mm
Mains plug	CH (type J), Schuko (type F) or UK (type G)
Light distribution	Direct
Beam angle	Adjustable 40° / 80°
Total luminous flux of luminaire	490 lm
Power consumption	13 W
Rated voltage	220-240V / 50Hz
Stand-by consumption	< 0,5 W
Safety class	I
Protection type	IP 20
Packaging units	1 (415 x 270 x 270 mm)
Weight	4.7 kg

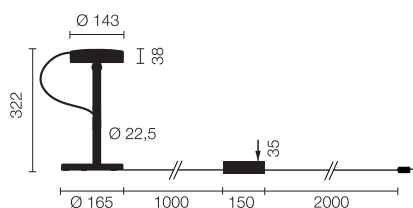

$\eta=97\%$ cd/1000 lm



design
preis
schweiz

Subject to technical modifications and modifications to content. © BELUX AG 03/2016



More information on
www.belux.com/u-turn

BELUX AG

Klünenfeldstrasse 22, Muttenz, CH-4127 Birsfelden
Tel. +41 61 316 74 01, Fax +41 61 316 75 99
www.belux.com, belux@belux.com