
Patera



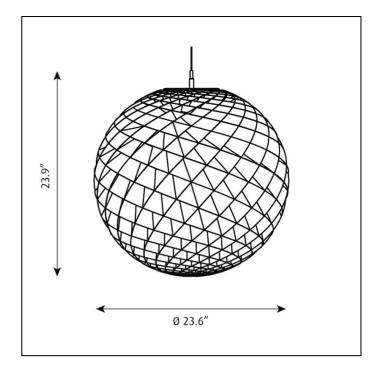

Øivind Slaatto Design

The pendant is a glowing sphere built up of small diamond-shaped cells. Each cell is carefully designed to capture light and to shield the light source from the viewing angles above 45 degrees. Each cell glows. Below 45 degrees, the fields are open to direct light downwards. A small amount of light is also sent upwards to illuminate the ceiling. Concept

Finish White, matte coated.

Material Shade: Matte PVC sheet. Frame: Clear polycarbonate inserts with white painted steel rods. Incandescent socket support: brass rod with matte chrome finish. LED:

Aluminum heatsinks and copper heat pipes.

Canopy: White. Cord type: 2-conductor, 18 AWG white PVC power cord. Cord length: 12'. LED variants include 1x stainless steel aircraft cable. Mounting

Weight Max. 10 lbs.

Label cULus, Damp location.

Product Code	Dimension	Light source	Voltage	Finish	Features
PATE-P	23.6".	1/200W/A-23/IF medium	120-277V	WHT	DIM 0-10V
		65W LED/2700K	120V		NOT APPLICABLE
		65W LED/3000K			

Specification notes

- a. Incandescent variant only available in 120V. b. LED variants only available in 120-277V. c. DIM 0-10V only available for LED variants.

