


## Castore Table 14



IP20   

### TECHNICAL DRAWINGS

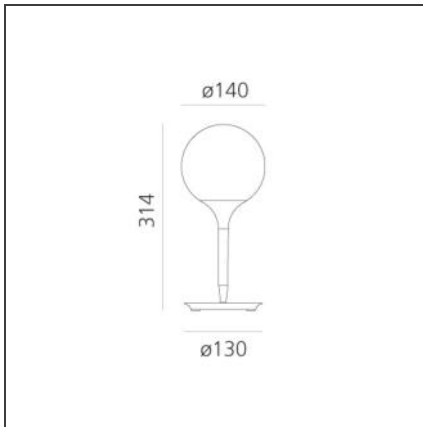

### DESIGN BY

Michele De Lucchi, Huub Ubbens

### DESCRIPTION

The spherical diffuser design is enhanced by a removable-fitting and tapering luminous stem, that makes the transition from the strong diffuser light to the blind lamp structure area gentle. Base in zamak, stem in thermoplastic resin, blown glass diffuser.

### FEATURES

<b>Article Code:</b>	1044110A	<b>Material:</b>	Zamak, polycarbonate, blown glass
<b>Colour:</b>	White	<b>Series:</b>	Design
<b>Installation:</b>	Table	<b>Area contract:</b>	Hospitality, Retail, Residential
<b>Environment:</b>	Indoor	<b>Emission:</b>	Diffused

### DIMENSIONS

<b>Height:</b>	cm 31.4	<b>Glow Wire Test:</b>	850
<b>Base Diameter:</b>	cm 12.2		

### SOURCES NOT INCLUDED

<b>Category:</b>	LED
<b>Number:</b>	1
<b>Watt:</b>	4W
<b>Type:</b>	2
<b>Socket:</b>	E14

### LUMINAIRE

<b>Watt:</b>	4W	<b>Delivered lumens output (lm):</b>	296lm
<b>Voltage:</b>	220V-240V	<b>CCT:</b>	2700K
		<b>Efficiency:</b>	86%
		<b>Efficacy:</b>	74.04lm/W
		<b>CRI:</b>	80

### Notes


Lamp included. Available in four sizes.

## Castore table 25



IP20    

### TECHNICAL DRAWINGS

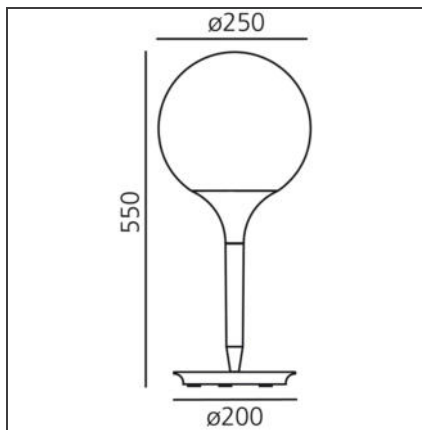

### DESIGN BY

Michele De Lucchi, Huub Ubbens

### DESCRIPTION

The spherical diffuser design is enhanced by a removable-fitting and tapering luminous stem, that makes the transition from the strong diffuser light to the blind lamp structure area gentle. Base in zamac, stem in thermoplastic resin, blown glass diffuser.

### FEATURES

<b>Article Code:</b>	1050010A	<b>Material:</b>	Zamak, polycarbonate, blown glass
<b>Colour:</b>	White	<b>Series:</b>	Design
<b>Installation:</b>	Table	<b>Area contract:</b>	Hospitality, Retail, Residential
<b>Environment:</b>	Indoor	<b>Emission:</b>	Diffused

### DIMENSIONS

<b>Height:</b>	cm 55	<b>Impact Resistance:</b>	N/D
<b>Base Diameter:</b>	cm 20	<b>Glow Wire Test:</b>	750

### NOT INCLUDED SOURCES

<b>Category:</b>	HALO	<b>Color temperature (K):</b>	3000 K
<b>Number:</b>	1	<b>Class:</b>	A
<b>Watt:</b>	77 W		
<b>Socket:</b>	E27		

### ALTERNATIVE SOURCES

<b>Category:</b>	LED
<b>Number:</b>	1
<b>Watt:</b>	15W
<b>Type:</b>	2
<b>Socket:</b>	E27
<b>Class:</b>	A

### LUMINAIRE

<b>Watt:</b>	W	<b>Delivered lumens output (lm):</b>	1452lm
<b>Voltage:</b>	220V-240V	<b>CCT:</b>	2900K
		<b>Efficiency:</b>	81%
		<b>Efficacy:</b>	14.52lm/W
		<b>CRI:</b>	100

### Notes


Touch dimmer button on the lamp base for the storage of the latest light intensity set-up or the use of a local or remote control (controlled socket). Available in four sizes.

## Castore table 35



IP20    

### TECHNICAL DRAWINGS

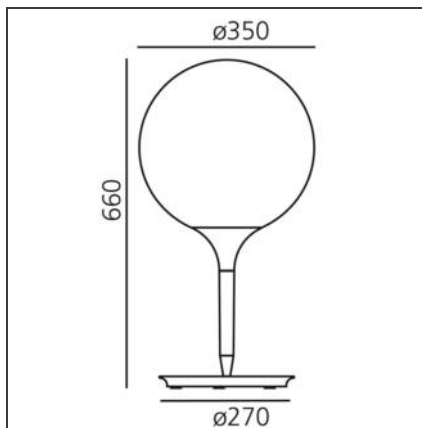

### DESIGN BY

Michele De Lucchi, Huub Ubbens

### DESCRIPTION

The spherical diffuser design is enhanced by a removable-fitting and tapering luminous stem, that makes the transition from the strong diffuser light to the blind lamp structure area gentle. Base in zamac, stem in thermoplastic resin, blown glass diffuser.

### FEATURES

<b>Article Code:</b>	1049010A	<b>Material:</b>	Zamak, polycarbonate, blown glass
<b>Colour:</b>	White	<b>Series:</b>	Design
<b>Installation:</b>	Table	<b>Area contract:</b>	Hospitality, Retail, Residential
<b>Environment:</b>	Indoor	<b>Emission:</b>	Diffused

### DIMENSIONS

<b>Height:</b>	cm 66	<b>Impact Resistance:</b>	N/D
<b>Base Diameter:</b>	cm 27	<b>Glow Wire Test:</b>	750

### NOT INCLUDED SOURCES

<b>Category:</b>	HALO	<b>Color Rendering:</b>	1a
<b>Number:</b>	1	<b>Color temperature (K):</b>	2900K
<b>Watt:</b>	150W		
<b>Lbs:</b>	Qt32		
<b>Socket:</b>	E27		
<b>Duration (h):</b>	2000h		

### ALTERNATIVE SOURCES

<b>Category:</b>	LED
<b>Number:</b>	1
<b>Watt:</b>	21W
<b>Delivered lumens output (lm):</b>	2452lm
<b>Type:</b>	2
<b>Socket:</b>	E27
<b>Class:</b>	A

### LUMINAIRE

<b>Watt:</b>	W	<b>Delivered lumens output (lm):</b>	2431lm
<b>Voltage:</b>	220V-240V	<b>CCT:</b>	2900K
		<b>Efficiency:</b>	85%
		<b>Efficacy:</b>	16.21lm/W
		<b>CRI:</b>	100

### Notes

Touch dimmer button on the lamp base for the storage of the latest light intensity set-up or the use of a local or remote control (controlled socket). Available in four sizes.