

FLOS

F0090009 White


Aim

Designed by Ronan & Erwan Bouroullec, 2013

16W - 895lm - 2700K

Suspension lamp emitting direct light. Features body in varnished aluminium with photo-etched optical polycarbonate shade and internal reflector in photo-etched ABS. Adjustable head allows flexible aiming of light. Supplied with 9-metre cable for suspension up to 3 metres from ceiling. Dimmable via Flos-approved LED Triac dimmer. Multiple ceiling rose available to connect up to five Aim units.

Designed by Ronan and Erwan Bouroullec in 2010, Aim reduces lighting to its essentials: a cable and a source of light. The freely adjustable body creates a dynamic play of lines and positions like a tangle of vines. Inspired by nature, the designers imagined Aim as a lamp that grows and adapts, offering endless possibilities in both single and clustered configurations. Its radical form and flexibility reimagine the concept of centralised lighting, allowing light to be aimed exactly where needed.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions [↓ PDF](#)

Dimmers or chargers compatible [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

Main specifications

EAN	8059607013267
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	16
Lumen Output (lm)	895

Physical


Colour	White
Length (mm)	243
Cord colour	White
Cord length (mm)	9000
Canopy colour	White
Canopy length/diameter (mm)	80
Canopy height (mm)	23
Net weight (kg)	3
Package height (mm)	375
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



OPTIONAL

F0093009

Aim Multiple Canopy




OPTIONAL

RF22227

Aim Dimmer

Spare Parts

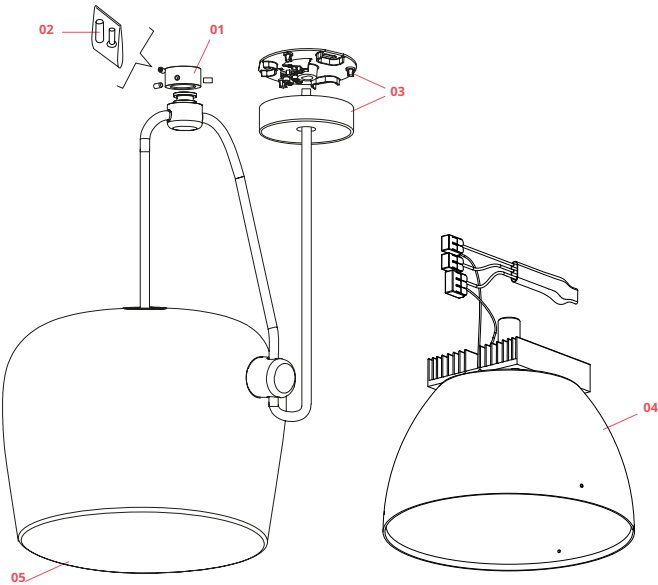

- | | | |
|-----|---|-----------|
| 01. | Aim/Aim Small Ceiling attachment assembly | RF0090109 |
| 02. | Aim/Aim Small Kit of quantity 3 m4 screws | RF06749 |
| 03. | Aim White ceiling rose assembly | RF0090209 |
| 04. | Aim Heatsink, 2700K Led Module & Reflector Assembly | RF0090700 |
| 05. | Aim opal diffuser | RF0090600 |



RF0090109

Aim/Aim Small Ceiling attachment
assembly



RF06749

Aim/Aim Small Kit of quantity 3
m4 screws



RF0090209

Aim White ceiling rose assembly



RF0090700

Aim Heatsink, 2700K Led Module
& Reflector Assembly



RF0090600

Aim opal diffuser